

CR-347V

347V Conversion Kit

Product Description

The 347V Conversion Kit allows a CR Series Troffer or CR Series Light Engine to be converted to work with 347V installations. The conversion kit can be easily installed in the field and works with step-dimming, 0-10V, and Lutron EcoSystem® versions of the CR Series Troffer or CR Series Light Engine.

Performance Summary

Input Voltage: 347 VAC

Warranty*: 1 year

Dimensions: Increases overall Troffer depth to 6.3"

Temperature Rating: Ambient 0°C - 25°C

*See www.cree.com/lighting/products/warranty for warranty terms

Product Specifications

ELECTRICAL SYSTEM

- **Power Factor:** > 0.9 nominal
- **Input Voltage:** 347V, 50/60Hz
- **Total Harmonic Distortion:** < 20%
- **Input Power:** Consult CR Series Troffer specification sheet

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for damp locations


Ordering Information

Example: CR-347V

Product	Voltage	Control
CR	347	
CR	34V 347 Volt	Blank Lutron EcoSystem® Enabled & 0-10V Dimming to 5% SD Step Dimming to 50%

NOTE: The 347V conversion kits will decrease the lumens per watt of the CR Series Troffer or CR Series Light Engine by 5 LPW. Not compatible with EB14 option or EJBRCR accessory

CR-347V

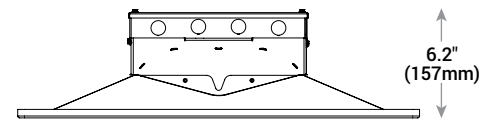

NOTE: CR Series Troffer or CR Series Light Engine must be order separately (not included with CR-347 or CR-347-SD)



Rev. Date: V2 10/22/2015

© 2015 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. Cree® is a registered trademark, and the Cree logo is a trademark of Cree, Inc. Lutron EcoSystem® is a registered trademark of Lutron Electronics Co., Inc.

US: www.cree.com/lighting

T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada



T (800) 473-1234 F (800) 890-7507