

Cree® UR Series

LED Upgrade Kit



THE EASIEST WAY TO BREAK THROUGH TO LED LIGHTING

Simple Installation

Retrofits existing fluorescent fixtures quickly with unique magnetic design and quick connect technology.

Performance-Optimized Technology

Provides high-efficacy light up to 102 lumens per watt along with a remarkable 7-year limited warranty.

Maximum Versatility

Offers both 2' and 4' options along with multiple lamp combinations, providing a fit for any application.

Code-Compliant Applicability

Designed to meet typical footcandle requirements for office and commercial space.

CREE 



REVOLUTIONARY DESIGN. UNBEATABLE COMPATIBILITY

The UR Series LED Upgrade Kit delivers enhanced spectrum 80 CRI light while achieving up to 102 lumens per watt. This innovative kit is designed to easily retrofit existing fixtures to energy-saving LED. The UR Series is available in neutral or cool color temperatures and step dimming comes standard. Its cost-effective, lightweight design and LED brilliance make the UR Series a fit for almost all applications where payback, price and quality are critical.

PERFORMANCE SUMMARY	
Efficacy: Up to 102 LPW at source level	Input Voltage: 120-277 VAC, 347V
Input Power: 4' - 44 watts / 2' - 36 watts	Limited Warranty: 7 years
CRI: 80	Lifetime: Designed to last 50,000 hours
CCT: 3500K, 4000K	Controls: Step Level to 50%, 0-10V to 5% (optional)
Regulatory & Voluntary Qualifications: DLC qualified	Mounting: Existing fluorescent fixtures
4' Kit: Delivered System Light Output: 4500 lumens Expected Fixture Light Output: 4000 lumens* 2' Kit: Delivered System Light Output: 3600 lumens Expected Fixture Light Output: 3200 lumens*	Accessories: Emergency Backup options available

KEY BENEFITS
<p>Cost-Saving Upgrade Targeted to deliver a shortened payback with low initial cost, the UR Series makes the switch to LED an easy one.</p> <p>Ease of Installation Designed from an installer's point of view, convert aging fluorescent fixtures quickly with magnetic clips that allow handsfree placement of LED lightbars and electrical quick connects for simple, error-free power connections.</p> <p>Construction & Materials Nearly all fluorescent fixtures are adaptable with the UR Series design flexibility of lightbars and driver technology. Additionally, the UR Series is designed to deliver light levels that meet the requirements of office and commercial spaces.</p>


INCLUDED IN KIT
<p>UR2-24™ / UR3-24™</p> <ul style="list-style-type: none"> • (2 or 3) 2' Lightbars • (1) LED Driver • (4) or (6) Mounting Clips • (8) or (12) Self-Tapping Screws • (1) Installation Instructions • (1) UL1598C Certification Label
<p>UR2-48™ / UR3-48™</p> <ul style="list-style-type: none"> • (2 or 3) 4' Lightbars • (1) LED Driver • (4) or (6) Mounting Clips • (8) or (12) Self-Tapping Screws • (1) Installation Instructions • (1) UL1598C Certification Label

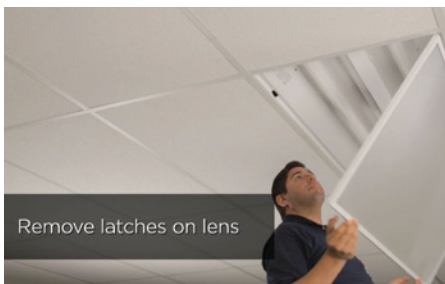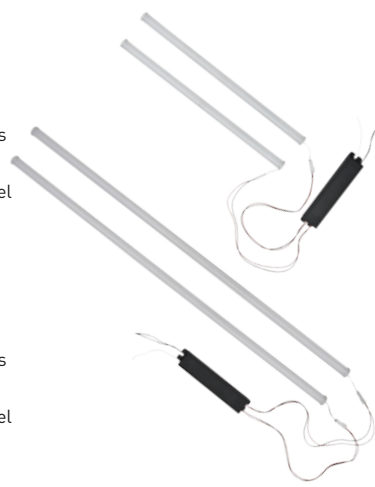

Remove latches on lens



Using magnets, attach lightbar to fixtures

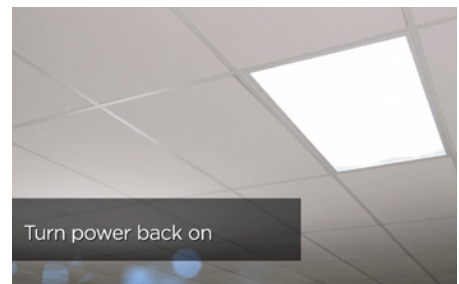

Turn power back on

Product specifications subject to change at any time.

*Varies by Fixture

Visit lighting.cree.com or contact a Cree lighting representative to learn more

info@cree.com | 800.236.6800

© 2017 Cree, Inc. All rights reserved. For informational purposes only. Not a warranty or specification. See lighting.cree.com/warranty for warranty and specifications. Cree® and the Cree logo are registered trademarks. CAT/SSHT-C006 Rev. Date: 06/29/17

