

# LOW-PROFILE LED CANOPY LIGHT - MEDIUM DISTRIBUTION


## 42-WATT LED (E.CP2L04CS)

**Applications:** Security, pathway and perimeter lighting. Also recommended for parking garages, shopping area walkways, and exterior canopies


**Typical Mounting Height:** 8 to 15 feet    **Typical Spacing:** 1 to 2 times the mounting height



2-3/8"H x 12"W x 12"D    Weight 7.5 lbs.



LED PATTERN

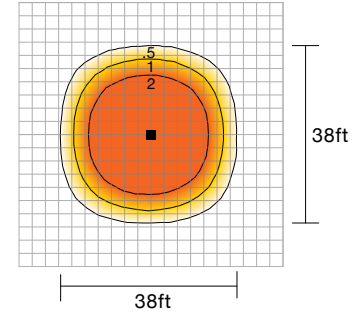

DISTRIBUTION PATTERN  
Bird's Eye View, Ceiling Mounted

Catalog #	Description	Input Voltage	Delivered Lumens	CCT	CRI	Lifetime (L <sub>70</sub> at 15°C)
E.CP2L04CS	42W LED Cool white	120V-277V	4100 Lumens	5000K	≤70	50,000 Hours

### Features

- 0-10V dimmable driver
- Rugged and durable aluminum housing
- Silver polyester powder-coat finish
- Minimum starting temperature: -22°F
- UV-stabilized acrylic lens with molded precision optics
- 1/2" conduit entry on top for pendant mounting
- Slots provided on top for mounting over a 4" square or octagonal J-box
- RoHS compliant
- ETL Listed for wet locations
- Cree® LEDs inside
- Five-year limited warranty. Certain exclusions apply. For details, visit [www.cree.com/lighting/ILS](http://www.cree.com/lighting/ILS)



This fixture is listed on the DesignLights Consortium® Qualified Products List.

### Accessories

None Available



INTEGRATED LIGHTING SOLUTIONS

© 2014 Cree, Inc. All Rights Reserved. The information in this document is subject to change without notice. Cree Integrated Lighting Solutions offers a full line of quality lighting products from Cree, Inc. and other manufacturers, including the product depicted above.