

XSP Series

XSPR™ LED Street/Area Luminaire – Version A

Product Description

In addition to a low initial cost, the XSPR™ LED Street luminaire maintains the familiar look of the traditional cobrahead design and delivers substantial energy savings while reducing maintenance time and costs. The hassle-free design of the XSPR™ luminaire includes tool-less entry and +/- 5° fixture leveling for easy installation. Our NanoOptic® Precision Delivery Grid™ optic achieves better optical control than traditional street lighting fixtures and efficiently delivers white uniform light for safer-feeling communities.

Applications: Roadway, parking lots, walkways and general area spaces

Performance Summary

NanoOptic® Precision Delivery Grid™ optic

Assembled in the U.S.A. of U.S. and imported parts

CRI: Minimum 70 CRI


CCT: 4000K (+/- 300K); 5700K (+/- 500K)

Limited Warranty*: 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

*See <http://lighting.cree.com/warranty> for warranty terms

Accessories

| Field-Installed |
|---|
| Backlight Control Shield XA-SPRBL5 - Provides 1/2 mounting height cutoff |

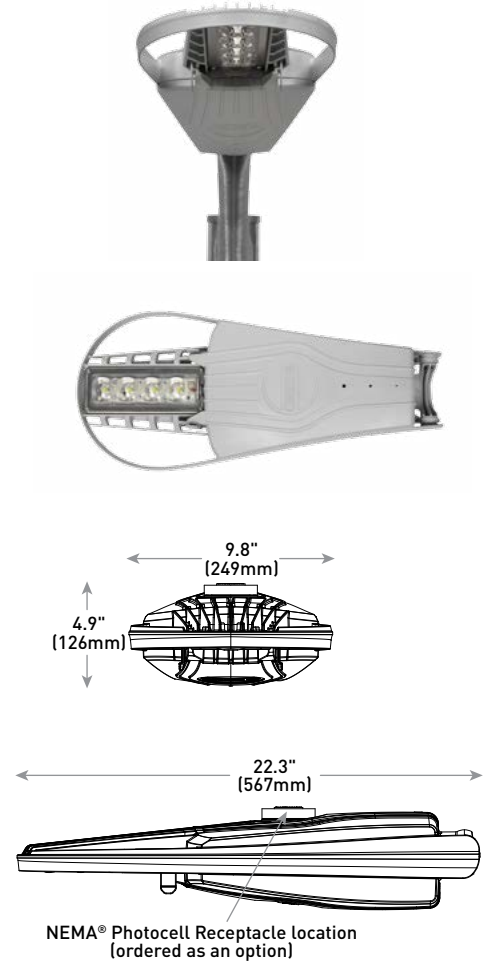

| Weight |
|-------------------|
| 13.9 lbs. (6.3kg) |

Ordering Information

Example: BXSPR-A-0-1-F-C-U-S

| BXSPR | A | 0 | | | | U | S | |
|---------|---------|--------------------------|---|--------------------------|------------------------|----------------------------|---------------|---|
| Product | Version | Mounting | Optic | CCT | Input Power Designator | Voltage | Color Options | Options |
| BXSPR | A | 0 Horizontal Tenon | 1* Type II Long 2* Type II Medium 3* Type III Medium | F 4000K M 5700K | C 42W G 25W | U Universal 120-277V | S Silver | N Utility Label and NEMA® Photocell Receptacle - External wattage label per ANSI C136.15 - 7-pin receptacle per ANSI C136.41 - Factory connected 0-10V dim leads - Photocell and shorting cap by others R NEMA® 7-Pin Photocell Receptacle - 7-pin receptacle per ANSI C136.41 - Factory connected 0-10V dim leads - Photocell and shorting cap by others UTL Utility Label - Includes exterior wattage label per ANSI C136.15 that indicates the maximum available wattage of the luminaire |

* Available with Backlight Shield when ordered with field-installed accessory (see table above)



Rev. Date: V5 10/19/2017



US: lighting.cree.com

T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada

T (800) 473-1234 F (800) 890-7507

Product Specifications

CONSTRUCTION & MATERIALS

- Die cast aluminum housing w/UV stabilized polymeric door for long weathering and reliability
- Tool-less entry
- Mounts on 1.25" IP, 1.66" [42mm] O.D. or 2" IP, 2.375" [60mm] O.D. horizontal tenon (minimum 8" [203mm] in length) and is adjustable +/- 5° to allow for fixture leveling
- Luminaire secures with two mounting bolts
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable silver powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion
- **Weight:** 13.9 lbs. (6.3kg)

ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V, 50/60Hz
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Class 2 driver
- Integral 10kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current
- Designed with 0-10V dimming capabilities. Controls by others
- **10V Source Current:** 0.15mA

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- Certified to ANSI C136.31-2001, 3G bridge and overpass vibration standards
- Meets CALTrans 611 Vibration testing
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Meets Buy American requirements within ARRA
- DLC qualified. Some exceptions apply. Please refer to <https://www.designlights.org/search/> for most current information
- RoHS compliant. Consult factory for additional details

| Electrical Data* | | | | | |
|------------------------|-----------------------|-------------------|------|------|------|
| Input Power Designator | System Watts 120-277V | Total Current (A) | | | |
| | | 120V | 208V | 240V | 277V |
| C | 42 | 0.34 | 0.20 | 0.18 | 0.16 |
| G | 25 | 0.21 | 0.12 | 0.10 | 0.10 |

* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%

| XSPR Version A Series Ambient Adjusted Lumen Maintenance ¹ | | | | | | |
|---|---------------|-------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------------------|
| Ambient | Optics | Initial LMF | 25K hr Projected ² LMF | 50K hr Projected ² LMF | 75K hr Projected ² LMF | 100K hr Calculated ³ LMF |
| 5°C (41°F) | 2ME, 2LG, 3ME | 1.04 | 1.02 | 1.01 | 1.01 | 1.00 |
| 10°C (50°F) | 2ME, 2LG, 3ME | 1.03 | 1.01 | 1.00 | 1.00 | 0.99 |
| 15°C (59°F) | 2ME, 2LG, 3ME | 1.02 | 1.00 | 0.99 | 0.98 | 0.98 |
| 20°C (68°F) | 2ME, 2LG, 3ME | 1.01 | 0.99 | 0.98 | 0.97 | 0.97 |
| 25°C (77°F) | 2ME, 2LG, 3ME | 1.00 | 0.98 | 0.97 | 0.96 | 0.96 |

¹Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors


²In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

³In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip


Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/street-and-roadway/xsp-series-1>

1




CESTL Test Report #: 2013-0152
BXSPR-A*-1-F-C-U
Initial Delivered Lumens: 3,579




BXSPR-A*-1-F-C-U
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 3,648
 Initial FC at grade

| Type II Long Distribution | | | | |
|---------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Input Power Designator | 4000K | | 5700K | |
| | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 |
| C | 3,648 | B1 U0 G1 | 3,925 | B1 U0 G1 |
| G | 2,416 | B1 U0 G1 | 2,600 | B1 U0 G1 |

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>



RESTL Test Report #: PL03995-001
BXSPR-A*-1-M-C-U w/XA-SPRBLs
Initial Delivered Lumens: 2,857




BXSPR-A*-1-M-C-U w/XA-SPRBLs
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 2,855
 Initial FC at grade


| Type II Long w/BLS Distribution | | | | |
|---------------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Input Power Designator | 4000K | | 5700K | |
| | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 |
| C | 2,655 | B0 U1 G1 | 2,857 | B0 U1 G1 |
| G | 1,759 | B0 U1 G1 | 1,893 | B0 U1 G1 |

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

2




CESTL Test Report #: 2013-0151
BXSPR-A*-2-F-C-U
Initial Delivered Lumens: 3,759




BXSPR-A*-2-F-C-U
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 3,819
 Initial FC at grade

| Type II Medium Distribution | | | | |
|-----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Input Power Designator | 4000K | | 5700K | |
| | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 |
| C | 3,819 | B1 U0 G1 | 4,109 | B1 U0 G1 |
| G | 2,529 | B1 U0 G1 | 2,722 | B1 U0 G1 |

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>



RESTL Test Report #: PL03993-001
BXSPR-A*-2-M-C-U w/XA-SPRBLs
Initial Delivered Lumens: 3,097



BXSPR-A*-2-M-C-U w/XA-SPRBLs
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 2,878
 Initial FC at grade

| Type II Medium w/BLS Distribution | | | | |
|-----------------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Input Power Designator | 4000K | | 5700K | |
| | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 |
| C | 2,878 | B0 U1 G1 | 3,097 | B0 U1 G1 |
| G | 1,906 | B0 U1 G0 | 2,052 | B0 U1 G1 |


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>




Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/street-and-roadway/xsp-series-1>


3




CESTL Test Report #: 2013-0150
BXSPR-A*-3-F-C-U
Initial Delivered Lumens: 3,695



BXSPR-A*-3-F-C-U
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 3,819
Initial FC at grade



RESTL Test Report #: PL03994-001
BXSPR-A*-3-M-C-U w/ XA-SPRBLS
Initial Delivered Lumens: 2,946



BXSPR-A*-3-F-C-U w/ XA-SPRBLS
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 2,738
Initial FC at grade

| Type III Medium Distribution | | | | |
|------------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Input Power Designator | 4000K | | 5700K | |
| | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 |
| C | 3,819 | B1 U0 G1 | 4,109 | B1 U0 G1 |
| G | 2,529 | B1 U0 G1 | 2,722 | B1 U0 G1 |

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens






** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

| Type III Medium w/BLS Distribution | | | | |
|------------------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Input Power Designator | 4000K | | 5700K | |
| | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 | Initial Delivered Lumens* | BUG Ratings** Per TM-15-11 |
| C | 2,738 | B0 U1 G1 | 2,946 | B0 U1 G1 |
| G | 1,813 | B0 U1 G1 | 1,952 | B0 U1 G1 |

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

Luminaire EPA

| Horizontal Tenon Mount – Weight: 13.9 lbs. (6.3kg) | | | | |
|---|---|---|---|---|
| Single | 2 @ 90° | 2 @ 180° | 3 @ 90° | 4 @ 90° |
| Tenon Configuration If used with Cree tenons, please add tenon EPA with luminaire EPA | | | | |
|  |  |  |  |  |
| PD-1H4; PT-1H | PD-2H4(90); PT-2H(90) | PD-2H4(180); PT-2H(180) | PD-3H4(90); PT-3H(90) | PD-4H4(90); PT-4H(90) |
| 0.57 | 0.85 | 1.14 | 1.42 | 1.56 |

Tenon EPA

| Part Number | EPA |
|------------------|------|
| PD Series Tenons | 0.09 |
| PT Series Tenons | 0.10 |
| WM-2L | 0.13 |
| XA-TMDA8 | 0.19 |

| Tenons and Brackets* (must specify color) | |
|---|--|
| <p>Square Internal Mount Horizontal Tenons (Aluminum)</p> <ul style="list-style-type: none"> - Mounts to 4" (102mm) square aluminum or steel poles PD-1H4 – Single PD-2H4(90) – 90° Twin PD-2H4(180) – 180° Twin PD-3H4(90) – 90° Triple PD-4H4(90) – 90° Quad <p>Wall Mount Brackets</p> <ul style="list-style-type: none"> - Mounts to wall or roof WM-2L – Extended Horizontal | <p>Round External Mount Horizontal Tenons (Aluminum)</p> <ul style="list-style-type: none"> - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons - Mounts to 3" (76mm), 5" (127mm), or 6" (152mm) square pole with PB-1A* tenon PT-1H – Single PT-2H(90) – 90° Twin PT-2H(180) – 180° Twin PT-3H(90) – 90° Triple PT-4H(90) – 90° Quad <p>Direct Arm Pole Adaptor Bracket</p> <ul style="list-style-type: none"> - Mounts to 3-6" (76-152mm) round or square aluminum or steel poles XA-TMDA8 |

‡ Refer to the [Bracket and Tenons spec sheet](#) for more details

* Specify pole size: 3 (3"), 5 (5"), or 6 (6") for single, double or triple luminaire orientation or 5 (5") or 6 (6") for quad luminaire orientation