

Essentia® Series Track

LED Beveled Cylinder Track Head

Product Description

The Essentia® Series Track LED Beveled Cylinder Track Head delivers 980 lumens using 15-watts. Available in four color temperatures, the track head is an excellent choice for applications requiring LED performance. Available in white, black, and silver polyester powder-coat finish, the track head provides beautiful light at 80CRI and are supplied with 20° spot reflector and 40° flood diffuse lens for easy beam angle interchangeability. Compatible with 1- or 2-circuit track from Essentia® Series Track, Juno, Prescolite, and Con-Tech. The track head is durable too, made with die-cast aluminum housing and backed with a 3-year limited warranty. An excellent choice for your next track project with an estimated 35,000+ hours of maintenance-free operation.

Applications: General purpose track lighting for indoor residential, commercial, retail or industrial applications

Performance Summary

Initial Delivered Lumens: 980 lumens

Input Power: 15 watts (75W equivalent)

CRI: 80

CCT: Soft White (2700K), Warm White (3000K), Neutral White (3500K) & Cool White (4000K)

Limited Warranty[†]: 3 years

Dimming: 10% with select dimmers*

Lifetime: Designed to last 35,000 hours

Weight: 0.9 lbs. (0.4kg)

[†] See <http://lighting.cree.com/warranty> for warranty terms

* Reference www.cree.com/lighting for recommended dimmers



6.5"H x 3.6"W x 5"D

Ordering Information

Example: S-CT-BVCLYL-10L-27K-BK

S-CT	BVCLYL	10L		
Series	Description	Initial Delivered Lumens	CCT	Housing Color
S-CT Essentia Series Track	BVCLYL Beveled Cylinder	10L 980 Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K	BK Black WH White SV Silver



US: lighting.cree.com

Rev. Date: V4 10/04/2018

T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada



T (800) 473-1234 F (800) 890-7507

Product Specifications

CONSTRUCTION & MATERIALS

- Durable aluminum housing with white, black, or silver polyester powder-coat finish
- Polycarbonate adapter with copper conductor
- Spring latch secures light fixture to track
- Pivot mount allows rotations up to 350° horizontally and 0-90° vertically in both directions for maximum aiming adjustability
- Supplied with 20° spot reflector and additional 40° diffuse lens for easy beam angle interchangeability. Diffuse lens changes lumen output to 950 lumens
- Compatible with 1- or 2-circuit track from Essentia® Series Track, and select track systems from Juno, Prescolite, and Con-Tech

ELECTRICAL SYSTEM

- Integral On/Off switch
- **Input Voltage:** 15 Watts (75W equivalent)

CONTROLS


- **Dimming:** 10%*
- **Recommended Dimmers:**
 - Leviton Trimatron 6683
 - Leviton Decora 6633
 - Cooper Aspire 9530
 - Lutron Diva/C-L DVCL-153P-XX
 - Lutron Lumea/LGCL-153PLH-XX

Note: The presence of a dimmer on this chart is not a guarantee or warranty of the compatibility of the fixture in any particular installation. The absence of a dimmer from this chart does not necessarily imply incompatibility

REGULATORY & VOLUNTARY QUALIFICATIONS

- cETLus Listed
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

Application Reference

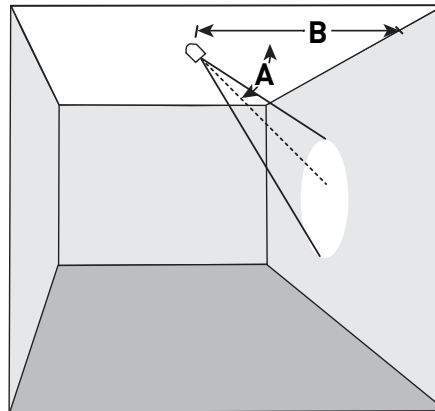

A = Preferred 60° aiming angle
B = Typical track head setback of 1.5'(0.5m) - 3.0' (0.9m) from wall