

IMPORTANT SAFEGUARDS


When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. 1. To avoid the possibility of electrical shock turn off power supply before installation or servicing.
2. Please read and understand all instructions thoroughly before installing any part of the Track system.
3. All MR16 lamp fixtures must include a glass lens accessory to provide proper shielding for MR16 lamp unless an open-rated covered glass MR16 lamp is used.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

INSERTING LAMP AND/OR REPLACING EXISTING LENS

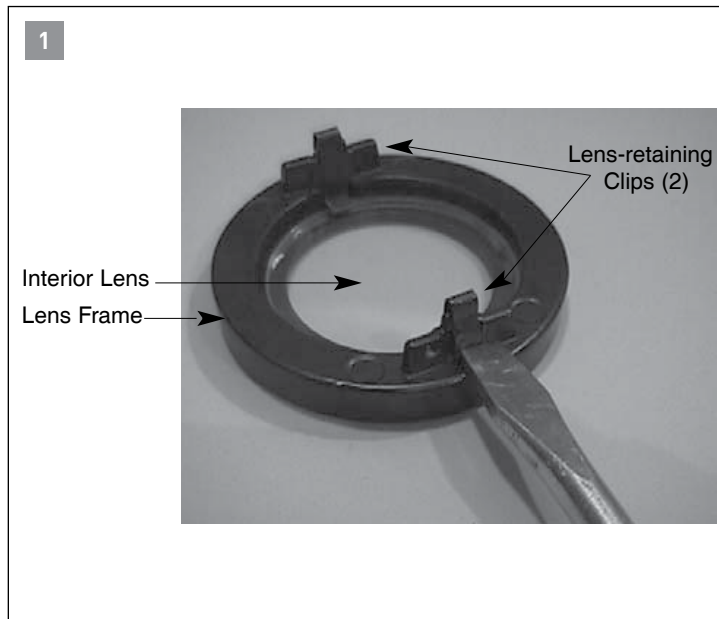

NOTE: Existing lens may be replaced with S-CT-LENS-CLEAR-1.9 (sold separately).

STEP 1

- Remove Lens Frame by pulling Lens Frame from Fixture Housing.

STEP 2

- Skip Steps 3, 4 and 5 if only inserting lamp.

STEP 3

- Remove the two Lens-retaining Clips by inserting a flat head screwdriver under the outside bottom of Lens-retaining Clip and turning gently. See **Figure 1**.

STEP 4

- Remove Interior Lens and insert new Lens.

STEP 5

- Secure new Lens in place with Lens-retaining Clips.

STEP 6

- Insert the bi-pin lamp base into socket in fixture.

STEP 7

- Replace Lens Frame on Fixture.