

Product Specifications

CREE TRUEWHITE® TECHNOLOGY

A revolutionary way to generate high-quality white light, Cree TrueWhite® Technology is a patented approach that delivers an exclusive combination of 90+ CRI, beautiful light characteristics, and lifelong color consistency, all while maintaining high luminous efficacy – a true no compromise solution.

CONSTRUCTION & MATERIAL

- Low brightness parabolic spun Alzak aluminum cone, 0.06" (2mm) thick with polished radius and continuous self-flange
- Soft Satin Glow Clear finish, standard
- 2" (51mm) aperture throat to accommodate all standard and up to 3" (76mm) thick ceilings and provide flexibility in mounting within grid
- Provided with quick mounting brackets for optional carrying channels
- Light engine, optics, and driver accessible from below ceiling

ELECTRICAL SYSTEM

- **Power Factor:** > 0.9 for 120V and 277V
- **Total Harmonic Distortion:** < 20% at full load
- **Input Power:** 120, 277V, or 347V, 50/60Hz
- **Operating Temperature Range:** -18°C - +40°C (0°F - +104°F); minimum operating temperature with EB7 option is 0°C (32°F)
- **10V Source Current:** 9L & 13L: 0.15mA; 20L-40L: 2.2mA; 60L: 0.11mA

CONTROLS

- For standard control offering refer to control availability chart on page 4
- Triac dimming to 5%
- Continuous dimming to 10% with 0-10V DC control protocol
- **10V Source Current:** 9L & 13L: 0.15mA; 20L-40L: 2.2mA
- For use with Class 2 dimming systems only
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- Lutron EcoSystem® Dimming to 1%
- Reference <http://creelighting.com/products/indoor/new-construction-downlights/kr-series> for recommended dimming controls and wiring diagrams

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for thru-wiring 8#12AWG-90°C
- Suitable for damp locations
- Designed for indoor use only
- Thermally protected Type NON-IC in accordance with Article 410 of the NEC and UL 1598
- Requires minimum 90°C supply conductors
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions
- EnergyStar® certified with the exception of 9L, 13L and 50K CCT. Please refer to <https://www.energystar.gov/productfinder/product/certified-light-fixtures/results> for most current information
- RoHS compliant. Consult factory for additional details
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

KR Series Ambient Adjusted Lumen Maintenance ¹						
Ambient	Initial Delivered Lumens	Initial LMF	25K hr Reported ² LMF	50K hr Reported ² LMF	75K hr Estimated ³ LMF	100K hr Estimated ³ LMF
5°C (41°F)	9L, 13L	1.04	1.04	1.04	1.04	1.04
	20L	1.04	1.04	1.04	1.04	1.04
	30L	1.04	1.03	1.03	1.03	1.03
	40L, 60L	1.04	1.01	1.00	1.00	1.00
10°C (50°F)	9L, 13L	1.03	1.03	1.03	1.03	1.03
	20L	1.03	1.03	1.03	1.03	1.03
	30L	1.03	1.02	1.02	1.02	1.02
	40L, 60L	1.03	1.00	0.99	0.99	0.99
15°C (59°F)	9L, 13L	1.02	1.02	1.02	1.02	1.02
	20L	1.02	1.02	1.02	1.02	1.02
	30L	1.02	1.01	1.01	1.01	1.01
	40L, 60L	1.02	0.99	0.98	0.98	0.98
20°C (68°F)	9L, 13L	1.01	1.01	1.01	1.01	1.01
	20L	1.01	1.01	1.01	1.01	1.01
	30L	1.01	1.00	1.00	1.00	1.00
	40L, 60L	1.01	0.98	0.97	0.97	0.96
25°C (77°F)	9L, 13L	1.00	1.00	1.00	1.00	1.00
	20L	1.00	1.00	1.00	1.00	1.00
	30L	1.00	0.99	0.99	0.99	0.99
	40L, 60L	1.00	0.96	0.96	0.96	0.95
30°C (86°F)	9L, 13L	0.99	0.99	0.99	0.99	0.99
	20L	0.99	0.98	0.98	0.98	0.98
	30L	0.99	0.98	0.98	0.98	0.98
	40L, 60L	0.99	0.96	0.95	0.95	0.94
35°C (95°F)	9L, 13L	0.98	0.98	0.98	0.98	0.98
	20L	0.98	0.97	0.97	0.97	0.97
	30L	0.98	0.97	0.97	0.97	0.97
	40L, 60L	0.98	0.95	0.94	0.94	0.94

¹ Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors.

² In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

³ Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.

Installation

- Recommended ceiling cutout 6.5" (165mm)



Note: 30L and 40L versions require marked spacing: 24" (600mm) x 12" (300mm) x 1/2" (12mm). 24" (600mm) luminaire to luminaire, 12" (300mm) luminaire to side wall, 1/2" (12mm) above luminaire

60L versions require marked spacing: 48" (1219mm) x 24" (600mm) x 1" (25mm). 48" (1219mm) luminaire to luminaire, 24" (600mm) luminaire to side wall, 1" (25mm) above luminaire

KR6™ LED Specification Downlight – Round 6"

Wall Wash


Based on KR6-30L-27K-120V W/KR6T-SSGC-FF-WW Luminaire

Down from Ceiling	2' from Wall				3' from Wall				4' from Wall			
	3' Centers		4' Centers		3' Centers		4' Centers		3' Centers		4' Centers	
	Center Line (FC)	Midpoint (FC)	Center Line (FC)	Midpoint (FC)	Center Line (FC)	Midpoint (FC)	Center Line (FC)	Midpoint (FC)	Center Line (FC)	Midpoint (FC)	Center Line (FC)	Midpoint (FC)
1'	20	20	25	11	10	10	10	7	6	6	5	5
2'	49	40	44	23	27	28	24	19	16	17	13	13
3'	49	44	43	28	29	31	24	22	23	24	18	19
4'	49	51	39	36	30	31	24	23	22	24	18	19
5'	42	44	29	36	34	35	28	27	22	23	18	18
6'	36	36	23	28	34	35	26	28	25	26	20	21
7'	29	30	19	23	31	32	25	26	27	28	22	23
8'	24	25	16	18	27	28	23	23	26	27	21	22
9'	20	22	13	16	24	25	20	20	24	25	20	20
10'	17	18	11	13	20	22	18	18	21	23	18	18

Photometry

KR6-30L-27K-120V W/KR6T-SSGC-FF BASED ON UL REPORT TEST #: 157473

Luminaire photometry has been conducted in accordance with IES LM-79-08. IES LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

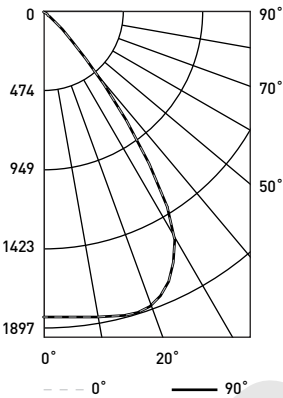

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	119	119	119	119
1	113	110	108	105
2	107	102	97	94
3	101	94	89	84
4	95	87	81	77
5	90	81	75	70
6	85	75	69	64
7	80	70	64	59
8	76	66	59	55
9	72	61	55	51
10	68	58	51	47

Effective Floor Cavity Reflectance: 20%

Average Luminance Table (cd/m²)				
Vertical Angle	Horizontal Angle			
	0°	45°	90°	
45°	19,317	19,317	19,317	
55°	4,459	4,459	4,459	
65°	2,074	2,074	2,074	
75°	931	931	931	
85°	0	0	0	

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	1,527	N/A	61.5%
0-40	2,206	N/A	88.8%
0-60	2,462	N/A	99.1%
0-90	2,483	N/A	100.0%
0-180	2,483	N/A	100.0%

Cone of Light		
Distance from Workplane	Footcandles	Beam Diameter
6' (1.8m)	51	7.3' (2.2m)
8' (2.4m)	29	9.7' (3.0m)
10' (3.0m)	18	12.3' (3.7m)
12' (3.7m)	13	14.5' (4.4m)
14' (4.3m)	9	17.4' (5.3m)

UL Test Report #: 157473
 KR6-30L-27K-120V
 w/KR6T-SSGC-FF
 Initial Delivered Lumens: 2,479
 Efficacy: 66 LPW
 S/M: 1.2

For exact photometric data, please reference our available IES and LM-79 test results at <http://creelighting.com/products/indoor/new-construction-downlights/kr-series>

KR6™ LED Specification Downlight – Round 6”

Application Reference

Based on KR6-30L-27K-120V W/KR6T-SSGC-FF Luminaire

Open Space					
Spacing	Lumens	Wattage	LPW	w/ft ²	Average FC
4 x 4	2,550	39	65	2.34	155
6 x 6				1.09	74
8 x 8				0.59	42
10 x 10				0.39	27

10' Ceiling, 80/50/20 Reflectances, 2.5' workplane. LLF: 1.0 Initial. Open Space: 50' x 40' x 10'

Corridor					
Spacing	Lumens	Wattage	LPW	w/ft ²	Average FC
4' on Center	2,550	39	65	1.63	77
6' on Center				1.11	52
8' on Center				0.78	37
10' on Center				0.65	31

10' Ceiling, 80/20/50 Reflectances, Light levels on the ground. LLF: 1.0 Initial. Corridor: 6' Wide x 100' Long

Control Availability Chart

Lumen Package	Non-Dimming			Triac Dimming to 5%			0/1-10V Dimming to 10%		
	120V	277V	347V	120V	277V	347V	120V	277V	347V
9L	N/A	S - Leave control Blank when ordering	N/A	S - Leave control Blank when ordering	N/A	N/A	O - Order w/10V	O - Order w/10V	O - Order w/10V
13L	N/A	S - Leave control Blank when ordering	N/A	S - Leave control Blank when ordering	N/A	N/A	O - Order w/10V	O - Order w/10V	O - Order w/10V
20L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	S - Order w/10V
30L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	S - Order w/10V
40L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	S - Order w/10V
60L	N/A	N/A	N/A	N/A	N/A	N/A	S - Order w/10V	S - Order w/10V	N/A

Control Availability Chart Cont'd.

LES Dimming to 1%			
Lumen Package	120V	277V	347V
9L	N/A	N/A	O-Order w/LES
13L	O-Order w/LES	O-Order w/LES	O-Order w/LES
20L	O-Order w/LES	O-Order w/LES	O-Order w/LES
30L	O-Order w/LES	O-Order w/LES	O-Order w/LES
40L	O-Order w/LES	O-Order w/LES	O-Order w/LES
60L	N/A	N/A	N/A

S = Standard Offering
O = Optional Offering

© 2020 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. KR6™ is a trademark of Cree Lighting, A company of IDEAL INDUSTRIES. Cree®, the Cree logo, TrueWhite®, Cree TrueWhite®, and the Cree TrueWhite Technology logo are registered trademarks of Cree, Inc. Lutron, the Lutron logo, EcoSystem, and the Lutron EcoSystem Enabled logo are trademarks or registered trademarks of Lutron Electronics Co., Inc. ENERGY STAR® and the ENERGY STAR logo are registered trademarks of the United States Environmental Protection Agency.

US: creelighting.com (800) 236-6800

Canada: creelighting-canada.com (800) 473-1234

CREE  **LIGHTING**

A COMPANY OF IDEAL INDUSTRIES, INC.